

DESCRIPTION

The PMP15 series of AC/DC wall mount switching power supplies are for 15 watts of continuous output power. They are enclosed in a 94V-1 rated polyphenylene-oxide case with four types of interchangeable AC plugs: European plug, UK plug and North American plugs. All models meet EN55011 and FCC class B emission limits, and are designed for medical application, not for life-supporting equipment.

FEATURES

- Interchangeable AC plugs
- High efficiency
- Low ripple & noise
- Overvoltage protection
- Short-circuit protection
- 100% burn-in at full rated load
- Standby consumption less than 0.3 W
- Compliant with CEC and ENERGY STAR efficiency level V requirements
- Compliant with RoHS requirements

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	0.5 A (rms) for 115 VAC 0.3 A (rms) for 230 VAC
Enclosure leakage current:	100 µA max. @ 264 VAC, 63 Hz

OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	1% peak to peak maximum(except 70 mVp-p max. for PMP15M-10)
Overvoltage protection:	Set at 116% to 230% of its nominal output voltage
Overcurrent protection:	Protected to short circuit conditions
Temperature coefficient:	±0.04% /°C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 µs after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0°C to +40°C
Storage temperature:	-40°C to +85°C
Relative humidity:	10% to 90% non-condensing
Derating:	Derate from 100% at +40°C linearly to 50% at +60°C

PMP15 SERIES



CE (LVD)

RoHS



SAFETY STANDARD APPROVALS



UL 60601-1, CSA C22.2 No. 601.1
File No. E 211696



TÜV EN 60601-1

GENERAL SPECIFICATIONS

Hold-up time:	8 ms minimum at 115 VAC
Turn on delay time:	3 s maximum at 115 VAC
Efficiency:	Compliant with Energy Star efficiency level V requirements (see rating chart)
Line regulation:	±0.5% maximum at full load
Inrush current:	30 A @ 115 VAC or 60 A @ 230 VAC (80 A for PMP15M/D/E-10) at 25°C cold start
Withstand voltage:	4000 VAC from input to output
MTBF:	300,000 hours at full load at 25°C ambient, calculated per MIL-HDBK-217F
EMC Performance (IEC60601-1-2)	
EN55011:	Class B conducted, Class B radiated
FCC:	Class B conducted, Class B radiated
VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class A and D
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, ±8 KV air and ±6 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ±2 KV
EN61000-4-5:	Surge, ±1 KV diff., ±2 KV com.
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 3 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, 60% reduction for 100 ms, and >95% reduction for 10 ms


OUTPUT VOLTAGE/CURRENT RATING CHART

Model ⁽¹⁾	Output						Average Active Efficiency (typical) @ 115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise ⁽²⁾	Max. Output Power	
PMP15M-10	5 V	0 A	3.0 A	±5%	70 mV	15 W	78 / 77 %
PMP15M-10-1	6 V	0 A	2.5 A	±5%	60 mV	15 W	80 / 78 %
PMP15M-11	9 V	0 A	1.67 A	±5%	90 mV	15 W	82 / 80 %
PMP15M-12	12 V	0 A	1.25 A	±5%	120 mV	15 W	82 / 80 %
PMP15M-13	15 V	0 A	1.0 A	±5%	150 mV	15 W	83 / 80 %
PMP15M-14	24 V	0 A	0.625 A	±5%	240 mV	15 W	85 / 81 %
PMP15D-10	5 V	0 A	3.0 A	±5%	50 mV	15 W	78 / 77 %
PMP15D-12	12 V	0 A	1.25 A	±5%	120 mV	15 W	82 / 80 %
PMP15D-14	24 V	0 A	0.625 A	±5%	240 mV	15 W	85 / 81 %
PMP15E-10	5 V	0 A	3.0 A	±5%	500 mV	15 W	78 / 77 %
PMP15E-12	12 V	0 A	1.25 A	±5%	120 mV	15 W	82 / 80 %
PMP15E-14	24 V	0 A	0.625 A	±5%	240 mV	15 W	85 / 81 %

NOTES:

1. PMP15M models are for interchangeable AC plugs which are to be ordered separately. PMP15D models are with fixed North American AC plug, and PMP15E models with fixed European AC plug.
2. Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

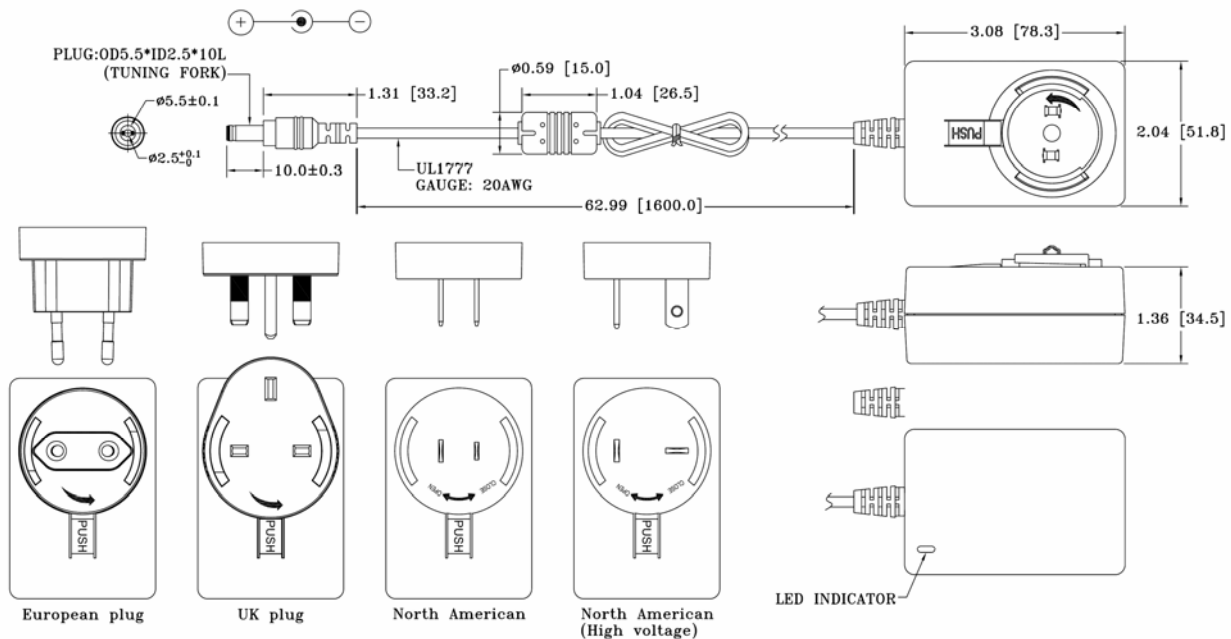

NOTES:

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Weight: 200 grams (0.44 lbs.) approx.
4. Output cable is 1600 mm 20 AWG except 1000 mm 16 AWG for 5V and 6V output models, and 1200 mm 18 AWG for 9V output model, so as to comply with CEC and Energy Star efficiency level V requirements.
5. Output connector is 5.5 mm O.D., 2.5 mm I.D., 10 mm long barrel female connector, center positive voltage.